




arem-1002402 Arkel AREM Handheld Programmer

Kod produktu: arem-1002402

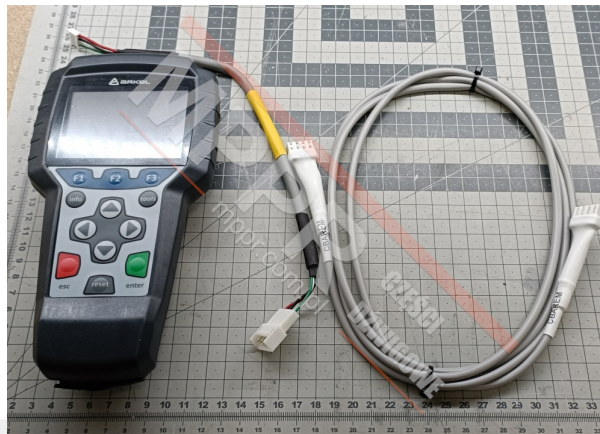

Arkel AREM Handheld Programmer for programming ARL500, ARL700 & ARCODE remotes

Dimensions Width × Length × Height (mm): 108 × 205.75 × 41.01

Weight (g): 288

Operating Temperature (°C): 0 - 60